

The PassThru™ Series Waist-High

Waist-Height Turnstiles • Bold Down • Interior and Exterior Application

PTS
PTR • PTZ

The PassThru™ Series is ideal in demanding situations where you want a more open, stylish look. It is made for years of reliable service in high traffic/volume applications be they indoors or outside. The cabinets are constructed of heavy 14-gauge, 300 series stainless steel and feature our versatile 6500 Series Control Head. This unit features our longest turnstile arm.



PTS



PTZ
Trapezoid-end with solid surface top



PTR
Round-end with solid surface top




Optional ticket box



Optional coin box

Solid Surface Top:

These are just a few of the solid surfaces available for your turnstile's custom top.

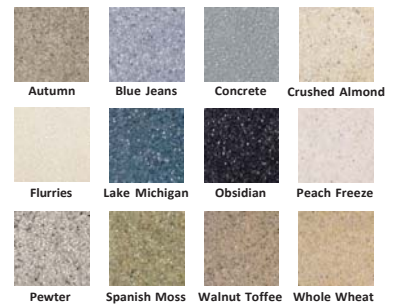

We're the #1 Choice of Top Architects, Security Pros and Engineers

For three decades, TURNSTILES US has been the globally trusted name in pedestrian control equipment. Made in USA and shipped worldwide, we are the first choice of leading architects, facility managers, security consultants and engineers. Whether your project requires high security full-height turnstiles, waist-high units, or matching ADA accessible gates, Controlling Access is the secure choice. And, we're experienced in access control systems, www.EntraPASS.com – Award Winning Access Control Systems.

The PassThru™ Series Waist-High

Waist-Height Turnstiles • Bold Down • Interior and Exterior Application

PTS

PTR • PTZ

Applications:

This series is made for years of reliable service in high traffic/volume environments where you seek a more open, stylish look.

Product Features:

Materials and Finishes:

Units are finished in your choice of:

- Our signature 304 stainless steel / No. 4 satin finish

Design & Construction:

- Designed for secure and reliable operation with aesthetics in mind
- Cabinet inner and outer shells and cover are constructed of (14 gauge) 304 stainless steel / No. 4 satin finish
- Arms assembly constructed with 1 5/16" (33mm) diameter, (12 gauge) stainless steel
- Hub 4 1/2" (114mm) o.d. also made from stainless
- Minimal exposed hardware

Measurements:

- Height: 38" (965mm)
- Width: 48.25" (1226mm)
- Depth: 10.25" (260mm)

Operation:

6500 Series Control Head, featuring:


- Auto-indexing (self-centering) with adjustable hydraulic shock suppression
- Hardened tool steel locking bars, cam and roller assemblies
- Permanently lubricated bearings
- Your choice of manual or electronic control on both directions
- Nearly universal integration to any number of access control systems
- Your choice on each electronic direction of locking or unlocking on power failure

Options:

- Bidirectional key overrides
- Daylight visible indicator lights
- 8 digit key resettable LCD counter with seven year lithium battery
- Rubber arm covers
- Coin/token acceptor
- Bill acceptor
- Ticket drop box
- Additional options available on request

Warranty:

Units are warranted against defects in materials and workmanship for a period of one year from date of delivery. See warranty information for specific details.

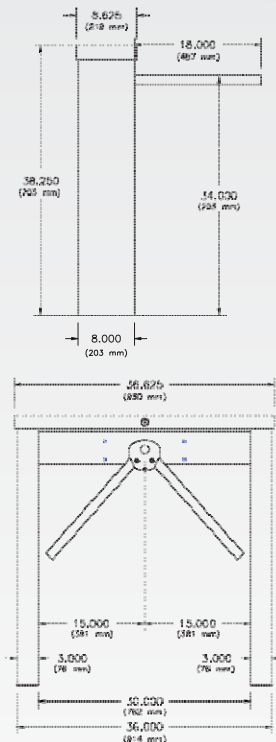

Dimensions are approximate.

Electrical Specifications:

Input Voltage: 100-240 VAC
Input Current: 1.3 - .55 A
Frequency: 50/60 Hz
Storage Temperature: -4 to 158°F
Operating Temperature: 32 to 122°F
Operating Voltage: 24VDC
Operating Current: 1.2 A (typical)

Standards and Codes:

Austenitic stainless steel:
ASTM A240, A249, A276
Hot rolled steel:
AISI C-1020, AISI C-1018
Hot dipped galvanizing:
ASTM A-143, ASTM A-153-80
Stainless steel fasteners:
ASTM A-320
American Welding Society (AWS)
Standard D 1.1



The 6500 series control head is certified to conform to UL Standard 325 & UL Subject 2593

